




MODEL
MT

**SMOOTH
and RELIABLE
OPERATION**

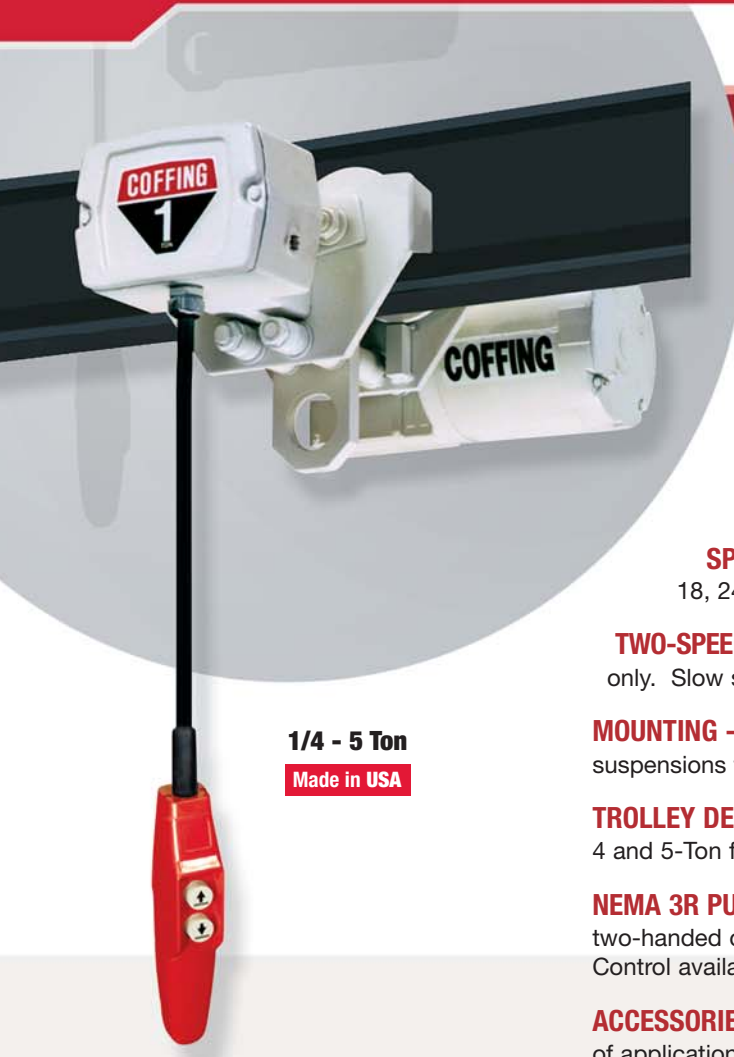

1/4 - 5 Ton

Made in USA

MT Motorized Trolley

COFFING MT Model Trolley - Features rugged construction with wrap-around side plates and heat treated wheels for reliable service. Universal clevis allows quick mounting of most hook mounted electric chain hoists.

CAPACITIES - Rated loads from 1/4 to 5 Tons. Push button drop is 6-feet.

VOLTAGES - 115/230, 208 - single phase; 230/460, 208, 220/380, 575 - three phase. 60 hertz standard, 50 hertz available.

SPEEDS - 35 and 75 FPM speeds standard with optional speeds of 18, 24, 50, 100, and 150 FPM.

TWO-SPEED MODELS - Optional with 3 to 1 speed ratio, three-phase, single voltage only. Slow speed feature for gentler start and greater positioning accuracy.

MOUNTING - Universal clevis will accept top hook models. Can change EC and JLC suspensions to lug mount directly to MT trolley — consult factory.

TROLLEY DESIGN - 4-wheel design on 1/4 - 3 Ton and under. 8-wheel design on 4 and 5-Ton for reduced beam flange stresses. Specify track type and beam size.

NEMA 3R PUSH BUTTON - Ergonomic design fits operator's hand for thumb or two-handed operation. 24 Volt Control standard for operator safety. 115 Volt Control available upon request.

ACCESSORIES - Trolley brake and other options available to meet a variety of applications.

LIFETIME WARRANTY

● **SPECIFICATIONS** ●

MT Motorized Trolley

Capacity			Model Number	Motor HP	Trolley Speed *	Flange Width (in.)	Min. Rad. Curve (in.)	Net Wt. (lb.)
(lb.)	(kg) †	(Ton)						
500	250	1/4	MT-05035	1/4	35 or 75	3.332 - 7	48	115
500	250	1/4	MT-05075	1/4	35 or 75	3.332 - 7	48	115
1000	500	1/2	MT-10035	1/4	35 or 75	3.332 - 7	48	115
1000	500	1/2	MT-10075	1/4	35 or 75	3.332 - 7	48	115
2000	1000	1	MT-20035	1/4	35 or 75	3.332 - 7	48	115
2000	1000	1	MT-20075	1/4	35 or 75	3.332 - 7	48	115
3000	1500	1 1/2	MT-30035	1/4	35 or 75	3.332 - 7	48	115
3000	1500	1 1/2	MT-30075	1/4	35 or 75	3.332 - 7	48	115
4000	2000	2	MT-40035	1/4	35 or 75	3.332 - 7	48	115
4000	2000	2	MT-40075	1/4	35 or 75	3.332 - 7	48	115
6000	3000	3	MT-60035	1/4	35 or 75	3.332 - 7	48	115
6000	3000	3	MT-60075	1/2	35 or 75	3.332 - 7	48	115
8000		4	MT-80035	(2) 1/4	35 or 75	4 - 7	***	220
8000		4	MT-80075	(2) 1/2	35 or 75	4 - 7	***	220
10000	5000	5	MT-100035	(2) 1/4	35 or 75	4 - 7	***	220
10000	5000	5	MT-100075	(2) 1/2	35 or 75	4 - 7	***	220

*** 4 & 5 Ton - straight track only. Articulated model for 48" min. radius curved track available — consult factory.

† Metric rated option available.

Note: For complete dimensional data, refer to Coffing Dimensional Databook.